


Flow Check Universal - Flow meter for compressed air and gases


Features & Benefits

- ▶ Incl. temperature measurement
- ▶ RS 485 interface, Modbus-RTU as a standard
- ▶ Integrated display for m³/h and m³
- ▶ Usable from 1/2" to DN 1000
- ▶ Easy installation under pressure
- ▶ 4-20 mA analog output for m³/h resp. m³/min
- ▶ Pulse output for m³ or M-Bus (optional)
- ▶ Inner diameter adjustable via keypad
- ▶ Total counter resettable
- ▶ **Adjustable via keys at the display:**
Reference conditions, °C and mbar, 4-20 mA scaling, pulse weight
- ▶ Option: Bi-directional measurement. Blue or green arrows in the display indicate the flow direction. A meter reading is available for each flow direction
- ▶ Inner diameter adjustable via keypad

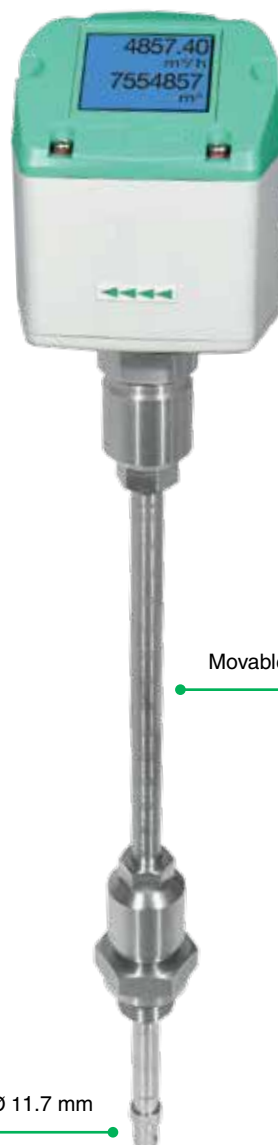

Safety ring Ø 11.7 mm

Options

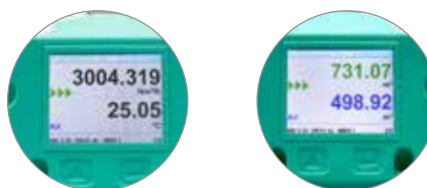

Bi-directional measurement. Blue or green arrows in the display indicate the flow direction. A meter reading is available for each flow direction

Description	Order no.
Flow Check Universal flow sensor in basic version: Standard (92.7 m/s), probe length 220 mm, without display	2255332455
Option: Bi-directional measurement - includes 2 x 4 - 20 mA analog outputs and 2x pulse outputs. These are not available for Ethernet (PoE) and M-Bus interface	2255332627
Options for Flow Check Universal :	
Display	2255332628
Max version (185 m/s)	2255332629
High Speed version (224 m/s)	2255332630
Low speed version (50 m/s)	2255332631
1 % Accuracy of m.v. \pm 0,3 % of f.s.	2255332632
Ethernet-Interface for Flow Check/ Flow Check Universal	2255332633
Ethernet-Interface PoE for Flow Check/ Flow Check Universal	2255332634
M-Bus board for Flow Check/ Flow Check Universal	2255332635
Probe length 120 mm	2255332636
Probe length 160 mm	2255332637
Probe length 300 mm	2255332638
Probe length 400 mm	2255332639
Probe length 500 mm	2255332640
Probe length 600 mm	2255332641
ISO calibration certificate (5 calibration points) for Flow sensors	2255332642
Gas type: ____ (specify type of gas when ordering)	2255332643
Gas mixture: ____ (specify gas mixture when ordering)	2255332644
Real gas calibration	2255332645
Special cleaning oil and grease-free (e. g. oxygen application)	2255332646
Silicone-free version incl. cleaning free of oil and grease	2255332647
Additional calibration curve stored in the sensor (selectable via display)	2255332648
Certificate of origin	2255332649

Technical data flow check universal	
Parameters	m ³ /h, l/min (1000 mbar, 20 °C) in case of compressed air resp. Nm ³ /h, NI/min (1013 mbar, 0 °C) in case of gases
Units adjustable via keys at display	m ³ /h, m ³ /min, l/min, l/s, ft/min, cfm, m/s, kg/h, kg/min, g/s, lb/min, lb/h
Adjustable via keypad	Diameter for volume flow calculation, counter resettable
Sensor	Thermal mass flow sensor
Measuring medium	Air, gases
Gas types are adjustable over PMH service software or PMH data logger	Air, nitrogen, argon, helium, CO ₂ , oxygen, vacuum
Measure range	See table page 75
Accuracy (m.v.: of meas. value) (f.s.: of full scale)	\pm 1.5 % of m.v. \pm 0.3 % of f.s. on request \pm 1.0 % of m.v. \pm 0.3 % of f.s.
Operating temperature	-30-110 °C probe tube -30-80 °C housing
Operating pressure	-1-50 bar
Digital output	RS 485 interface (Modbus-RTU), Optional: Ethernet-Interface PoE), M-Bus
Analog output	4-20 mA for m ³ /h e. g. l/min;
Pulse output	1 Pulse per m ³ or per liter galvanically isolated. Pulse value can be set on the display. Alternatively, the pulse output can be used as an alarm relay
Supply	18-36 VDC, 5 W
Burden	< 500 Ω
Housing	Polycarbonate (IP 65)
Probe tube	Stainless steel, 1.4301 Mounting length 220 mm, \varnothing 10 mm
Mounting thread	G 1/2"
\varnothing Casing	65 mm
Mounting position	any

Easy installation and removal under pressure

- ▶ Even under pressure, the flow sensor Flow Check Universal is mounted by means of a standard 1/2" ball valve. During mounting and dismounting the circlip ring avoids an uncontrolled ejection of the probe which may be caused by the operating pressure.

For the mounting into different pipe diameters Flow Check Universal is available in the following probe lengths: 120, 160, 220, 300, 400 mm. So the flow sensors are being mounted into existing pipelines with inner diameters of 1/2" upwards.

The exact positioning of the sensor in the middle of the pipe is granted by means of the engraved depth scale. The maximum mounting depth corresponds with the respective probe length. Example: Flow Check Universal with probe length 220 mm has a maximum mounting depth of 220 mm.

- ▶ If there is no suitable measuring point with 1/2" ball valve, there are two easy ways to set up a measuring point:



A. Weld on a 1/2" screw neck and screw on a 1/2" ball valve

B. Mount spot drilling collar incl. ball valve (see accessories)

Drill holes can be drilled through the 1/2" ball valve into the existing tubing with the help of the drilling device, the drill chips are collected in a filter, then the probe is installed as described under 1).

- ▶ Due to the large measuring range of the probe even extreme requirements to the flow measurement (high volume flow in small pipe diameters) can be met.

The measuring range is depending on the pipe diameter - see table on the right hand side.

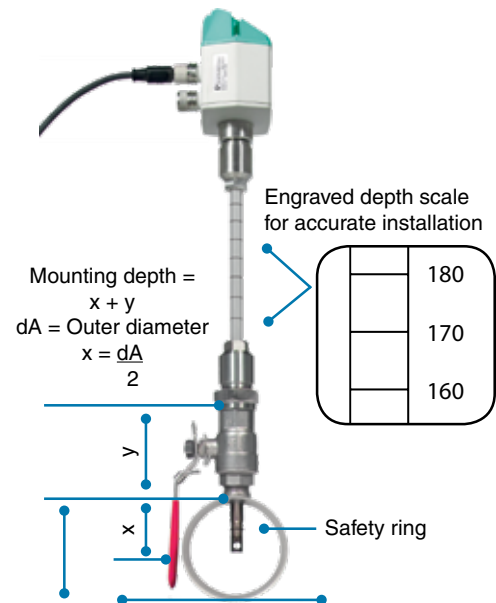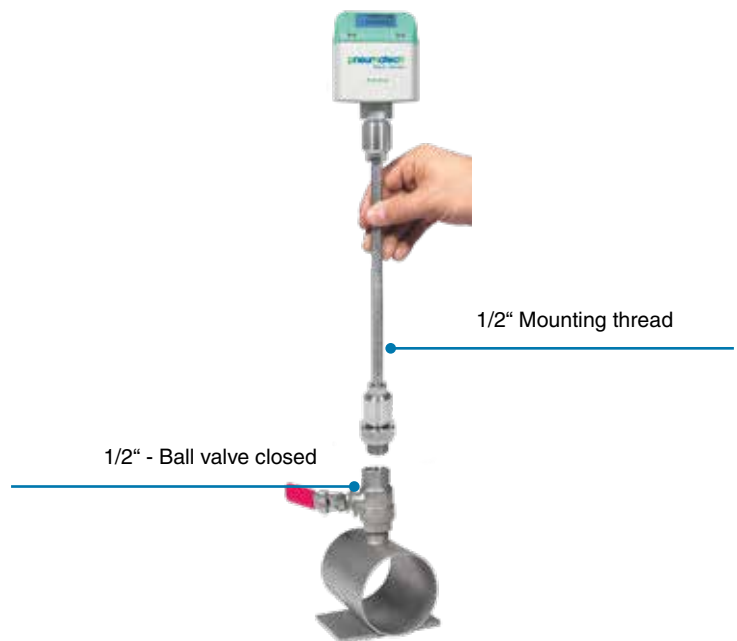

Options



A Screw neck



B Spot drilling collar



Drill under pressure with the PMH Drill

Measuring ranges Flow Check Universal for compressed air (ISO 1217: 1000 mbar, 20°C) Measuring ranges for other types of gas see pages 70-73

Inner diameter of pipe			Flow Check Universal Standard (92,7 m/s)		Flow Check Universal Max. (185,0 m/s)		Flow Check Universal High Speed (224,0 m/s)	
Inch	mm		Measuring range m³/h (cfm)		Measuring range m³/h (cfm)		Measuring range m³/h (cfm)	
1/2"	16,1	DN 15	759 l/min	26	1516 l/min	53	1836 l/min	64
3/4"	21,7	DN 20	89 m³/h	52	177 m³/h	104	215 m³/h	126
1"	27,3	DN 25	148 m³/h	86	294 m³/h	173	356 m³/h	210
1 1/4"	36,0	DN 32	266 m³/h	156	531 m³/h	312	643 m³/h	378
1 1/2"	41,9	DN 40	366 m³/h	215	732 m³/h	430	886 m³/h	521
2"	53,1	DN 50	600 m³/h	353	1197 m³/h	704	1450 m³/h	853
2 1/2"	68,9	DN 65	1028 m³/h	604	2051 m³/h	1207	2484 m³/h	1461
3"	80,9	DN 80	1424 m³/h	838	2842 m³/h	1672	3441 m³/h	2025
4"	110,0	DN 100	2644 m³/h	1556	5278 m³/h	3106	6391 m³/h	3761
5"	133,7	DN 125	3912 m³/h	2302	7808 m³/h	4594	9453 m³/h	5563
6"	159,3	DN 150	5560 m³/h	3272	11096 m³/h	6530	13436 m³/h	7907
8"	200,0	DN 200	8785 m³/h	5170	17533 m³/h	10318	21229 m³/h	12493
10"	250,0	DN 250	13744 m³/h	8088	27428 m³/h	16141	33211 m³/h	19544
12"	300,0	DN 300	19814 m³/h	11661	39544 m³/h	23271	47880 m³/h	28177